



FEATURES...

The RADOS MicroCont II is a handheld contamination monitor in a functional design that features:

- alpha, beta or gamma measurement
- high sensitivity by large detection area
- large multifunctional display
- automatic background subtraction
- 10 profiles, where parameters can only be modified via normal office PC
- memory for max. 500 measurement results

RADOS MicroCont II


Handheld contamination monitor

The RADOS MicroCont II of the CheckPoint:Area™ family of contamination monitors is the specialist for alpha-beta contamination, that optionally can also be reconfigured to measure beta or gamma contamination.

External detectors can be connected by optional adapter plate.

The large multifunctional display, which can be illuminated, is easy to use and to operate. The internal software supplies the user with 10 measurement profiles and parameter modification via a normal office PC by using an internal or external IR-interface.

The memory keeps up to max. 500 measurement results which can be exported into MS-Excel.

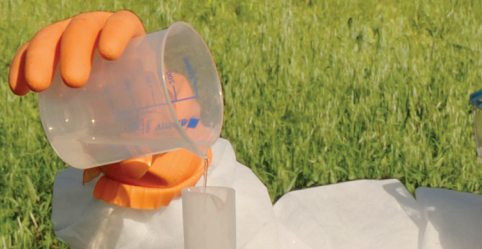

health physics

A Mirion Technologies Division

Featuring:

RADOS

TECHNICAL SPECIFICATIONS:

- Overview of Features** The MicroCont II can be operated with large area gas flow proportional detectors, Beta-Plastic or with Gamma-Plastic scintillation detectors
- RGZ large area gas flow proportional detectors (for alpha and beta measurement)
 - detection area (177 cm²)
 - integrated gas supply (75 cm³)
 - simple gas flushing via push button, refill via single use cans with liquid propane-butane
 - RBP170 Beta-Plastic Detector (for beta measurement)
 - no gas supply necessary
 - detection area (176 cm²)
 - Can be used at temperatures down to -10 °C
 - RPD Gamma-Plastic Detector (for gamma measurement)
 - no gas supply required
 - detection area (176 cm²)
 - Can be used at temperatures down to -10 °C
 - The compact MicroCont II housing, made from impact-resistant ABS, is splash-proof (IP 63) and can be decontaminated. It is colored yellow, ergonomically shaped, and features a handle with integrated on/off button as well as a membrane keyboard with large keys.
 - The measurement results are indicated on the illuminated LCD in analogue format as bar chart and by acoustic single pulse indicator (switch able).
 - The MicroCont II is powered by standard baby cells for a 200 hour operational period (battery check in LCD display). External power supply is available as option.
 - The alarm set points can be freely preselected over the whole range. Acoustic alarms can be acknowledged. An optical alarm is displayed on the LCD by alarm segment.
 - Activity can be determined accurately by long-term measurements:
 - in timer mode with a selectable measurement period of up to 600 s
 - in counter mode using pulse selection, automatic termination of measurement. Storage of data possible

- References** RADOS MicroCont II is a result of product development over many generations of RADOS and Herfurth handheld contamination monitors.
- The MicroCont II monitor of the CheckPoint:Area™ family has been used to measure contamination in applications as diverse as
 - nuclear medical applications
 - nuclear research and power applications
 - homeland security, defence and emergency response applications
 - industrial applications such as the oil exploration industry

Since norms, specifications and designs are subject to occasional change, please ask for confirmation of the information given in this publication.

© Copyright 2008, All rights reserved. For trademark and registered trademark information. The copyright in this work is the exclusive property of Mirion Technologies (RADOS) GmbH and is protected under the laws of Germany and other countries worldwide.



www.mirion.com
7NUC_MCI_LY015-086E_2_FL

Mirion Technologies (MGPI) Inc
5000 Highlands Parkway
Suite 150
Smyrna Georgia 30082
USA
T +1.770.432.2744
F +1.770.432.9179

Mirion Technologies (MGPI) SA
BP 1
F-13113 Lamanon
France
T +33 (0) 4 90 59 59 59
F +33 (0) 4 90 59 55 18

Mirion Technologies (RADOS) Oy
P.O. Box 506
FIN-20101 Turku
Finland
T +358 2 4684 600
F +358 2 4684 601

Mirion Technologies (RADOS) GmbH
Ruhrstrasse 49
D-22761 Hamburg
Germany
T +49 40 85193 0
F +49 40 85193 256